



香港霧業工程有限公司
Hong Kong Misting Engineering Limited

全密封防水系統

C-Pro 高效能自黏防水卷材



Fully Bonded Waterproofing System — C-Pro High-Performance Self-Adhesive Waterproof Membrane

防水層與混凝土持久黏結
Durable Bonding with Concrete Structure

測試證明耐 60 米水壓不滲漏
Tested to Withstand 60 m Water Head

長效結構級防水
Long-Term Structural Waterproofing

降低雨天噪音
Rain Noise Reduction

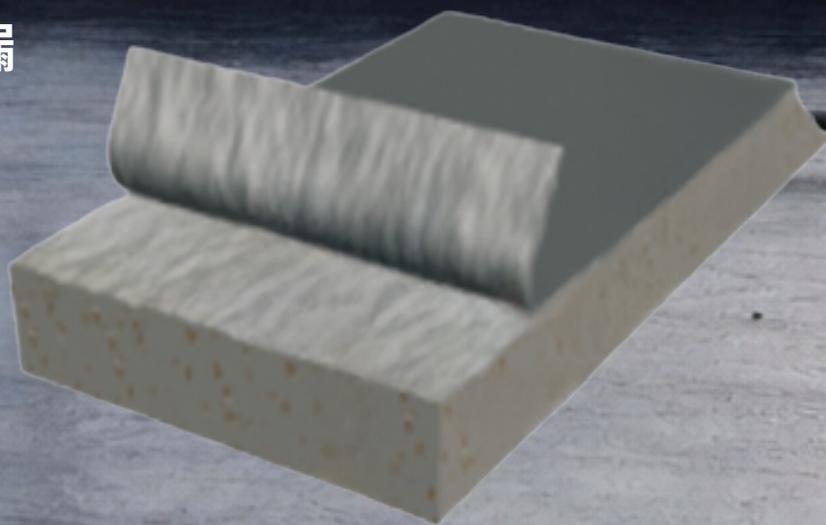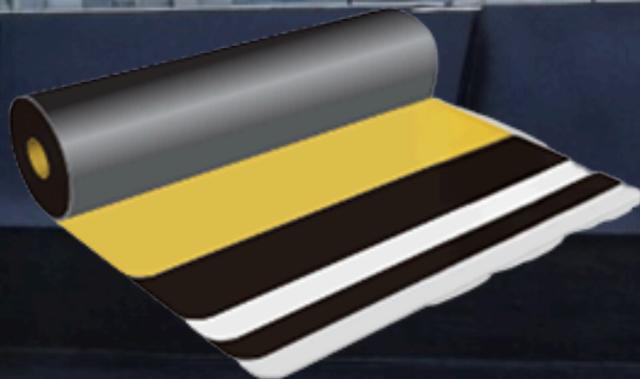

香港霧業工程有限公司
Hong Kong Misting Engineering Limited

WhatsApp 或致電我們

+852-6300-7134

香港新界葵涌大連排道182-190號金龍工業中心4座4樓D&E室

Rm 4D & E, Block 4, Golden Dragon Industrial Centre, 182-190
Tai Lin Pai Road, Kwai Chung, New Territories., Hong Kong


<https://www.hkmisting.com>



C-Pro 高效能自黏防水卷材

C-Pro 高效能自黏防水卷材採用先進反應黏技術，透過化學反應與物理卯榫雙重機制，使防水層與混凝土結構形成持久穩定結構級黏結，建構真正全密封防水系統。系統可有效阻斷界面水分竄流風險，確保長期防水安全表現。經權威測試驗證，卷材接縫可承受相當於 60 米水頭水壓而不滲漏，即使局部破損，仍可維持整體密封效能，特別適用於高耐久要求建築及地下工程。

C-Pro High-Performance Self-Adhesive Waterproof Membrane forms a durable, structural-grade bond with concrete through chemical reaction and mechanical interlocking. The fully bonded system prevents water migration and delivers long-term waterproofing performance. Tested to withstand water pressure equivalent to a 60-metre water head without leakage.

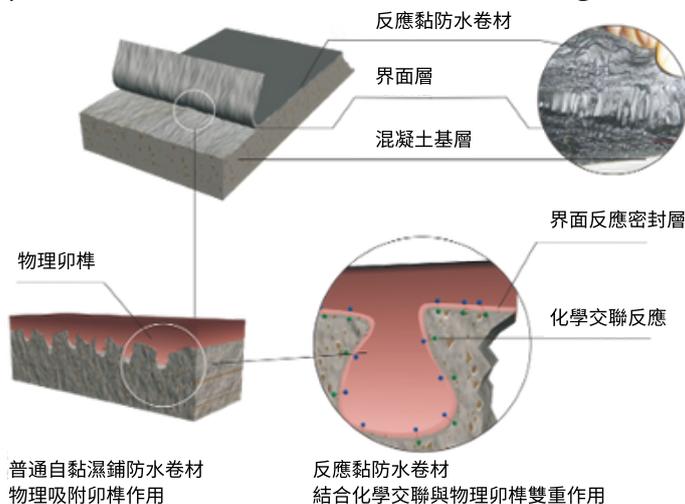

產品檢測項目 Inspection Items

測試條件 Test Item	搭接方式 Lapping Method	試件數量 No. of Specimens	竄水情況 Water Migration
於 0.5 MPa 水壓下恆壓 24 小時，其後升壓至 0.6 MPa，並恆壓 4 小時。測試完成後取出試件，觀察是否出現竄水現象。 Maintained at 0.5 MPa for 24 hours, then increased to 0.6 MPa for 4 hours. Specimens were inspected for water migration after testing.	雙面黏自黏搭接 Double-sided bonded self-adhesive lap	3	0
	雙面黏濕鋪搭接 Double-sided bonded wet-applied lap	3	0
	單面黏自黏搭接 Single-sided bonded self-adhesive lap	3	0
	單面黏濕鋪搭接 Single-sided bonded wet-applied lap	3	0

產品優勢 Product Advantages

- 持久黏結**
Durable Bonding
透過化學反應與物理卯榫，使防水層與混凝土形成穩定結構級黏結。
Forms a stable, structural-grade bond with concrete for long-term adhesion.
- 不滲漏**
Leak-Free Performance
全界面緊密結合，有效阻斷水分竄流，即使高水壓亦能維持密封。
Fully bonded system prevents water migration and remains watertight under pressure.
- 長效防水**
Long-Term Waterproofing
提供長期可靠防水保護，顯著降低滲漏風險與後期維修需求。
Delivers durable waterproofing performance throughout the structure service life.
- 柔韌伏貼**
Flexible and Conformable
柔韌材質設計，緊密伏貼基層，隨形密封各建築部位，提升整體防水完整性。
Flexible membrane conforms to substrates and seals complex building details.
- 降低雨天噪音**
Rain Noise Reduction
有效減低雨滴敲擊金屬屋頂的噪音，讓工廠、倉庫、貨櫃屋雨天更寧靜。
Reduces rain noise on metal roofs.

適用場地 Applicable Sites

- 適用部位**
Applicable Areas
地下室底板、頂板、側牆、屋面
Basement slabs, roofs, side walls, and roof decks
- 施工方式**
Installation Methods
濕鋪、乾粘、預鋪
Wet-applied, dry-bonded, or pre-applied systems